

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____



KEY FEATURES:

- LED display
- Smart Kit Ready
- Quiet operation
- Multiple fan speeds (LOW/MED/HI/TURBO)
- Auto-swing for vertical louvers




SPECIFICATIONS:

Indoor Model			CH-B24MOLVWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	23,000
Heating	Rated Capacity	Btu/h	26,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	760.59/601.18/458.82/382.35
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	46.5/44/35
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	3/8" / 5/8"
Dehumidification		Pnt/H	5.14
Communication wiring			16AWG*4
Indoor	Dimension (WxDxH)	inch	42.64x9.61x13.23
	Packing (WxDxH)	inch	45.47x16.34x12.40
	Net/Gross Weight	lbs.	29.98/38.14

OLIVIA

Units: in

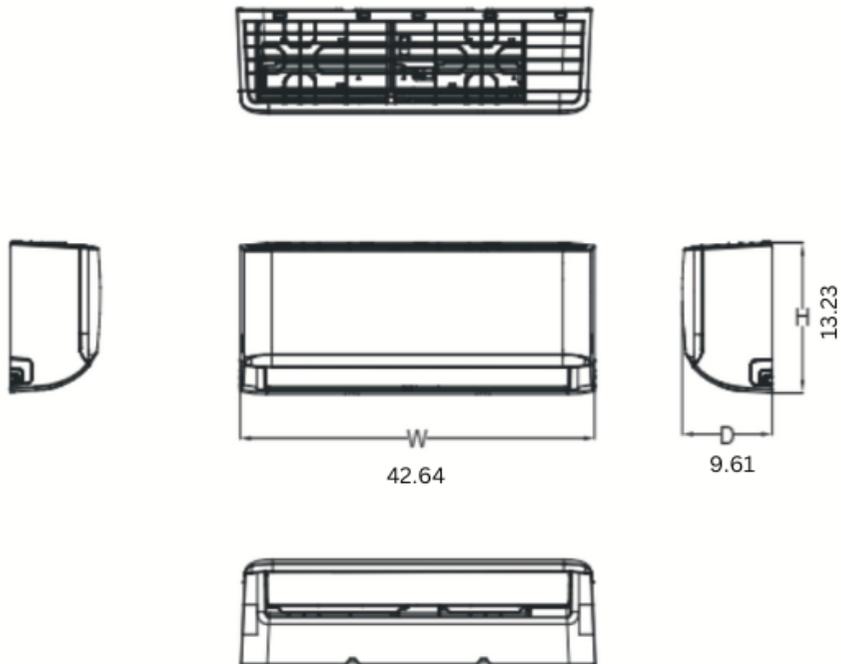

Dimension (WxDxH)
42.64x9.61x13.23