

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____



KEY FEATURES:


- Up to 4 Zone
- Inverter Technology
- HIGH-FREQUENCY RACER TECHNOLOGY: Enables the compressor to reach maximum speed within 6 seconds on start up.
- HIGH-EFFICIENCY PIPES: 54 teeth to increase heat exchange.
- INTELLIGENT DUSTING SWITCH: Reverses the fan to clean dust, sand, and other debris from the coil.
- The Cooper&Hunter standard warranty offers seven years on the compressor and five years on parts.

Cooling Capacity		Heating Capacity	SEER2	EER2	COP
Btu/h	Btu/h	Btu/h			
36,000(17,400~44,000)	37,000(13,300~52,000)		19	11.7	3.88

**Please note: for ducted solutions, values are represented with Outdoor Units combined with Indoor ducted units. Values will vary with depending on the combination of Outdoor/Indoor models used.*

SPECIFICATIONS:

Outdoor Model			CH-HPR36M-230VO
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling		Rated Capacity (range)	Btu/h
			36,000(17,400~44,000)
Heating		Rated Capacity (range)	Btu/h
			37,000(13,300~52,000)
		HSPF4	10
		HSPF5	8.1
Minimum Circuit Ampacity (MCA)		A	40
Max. Fuse		A	60
Rated current (RLA)		A	14.2(3.7~21.5)
Compressor	Model		ATQ360D1UMU
	Type		ROTARY
	Brand		GMCC
	RLA	A	24
	Input	w	3,040
	Refrigerant oil	oz	VG74 47.3
Outdoor fan motor	Qty		2
	Input	w	126
	RLA	A	2.5
Outdoor air flow (Max)		CFM	4,500
Outdoor noise level (Max)		dB(A)	60
Outdoor unit	Dimensions (WxDxH)	in	37.48x16.34x52.48
	Packing (WxDxH)	in	43.11x19.49x58.27
	Net/Gross weight	in	223.11/253.97
Refrigerant	Type/Quantity	oz	R410A
	Precharge	ft	25x4
	Additional Charge (liquid pipe)	oz	162.26
Design pressure		PSIG	550/340
Refrigerant piping	Liquid side/Gas side	in	4x1/4" 2x3/8"+2x1/2"
	Max. length for all indoor units	ft	262.46
	Max. length for one indoor unit	ft	114.83
	Max. height difference between indoor and outdoor	ft	49.21
	Max. height difference between indoor units	ft	33
Ambient temperature	Cooling	F	5~122
	Heating	F	-22~75

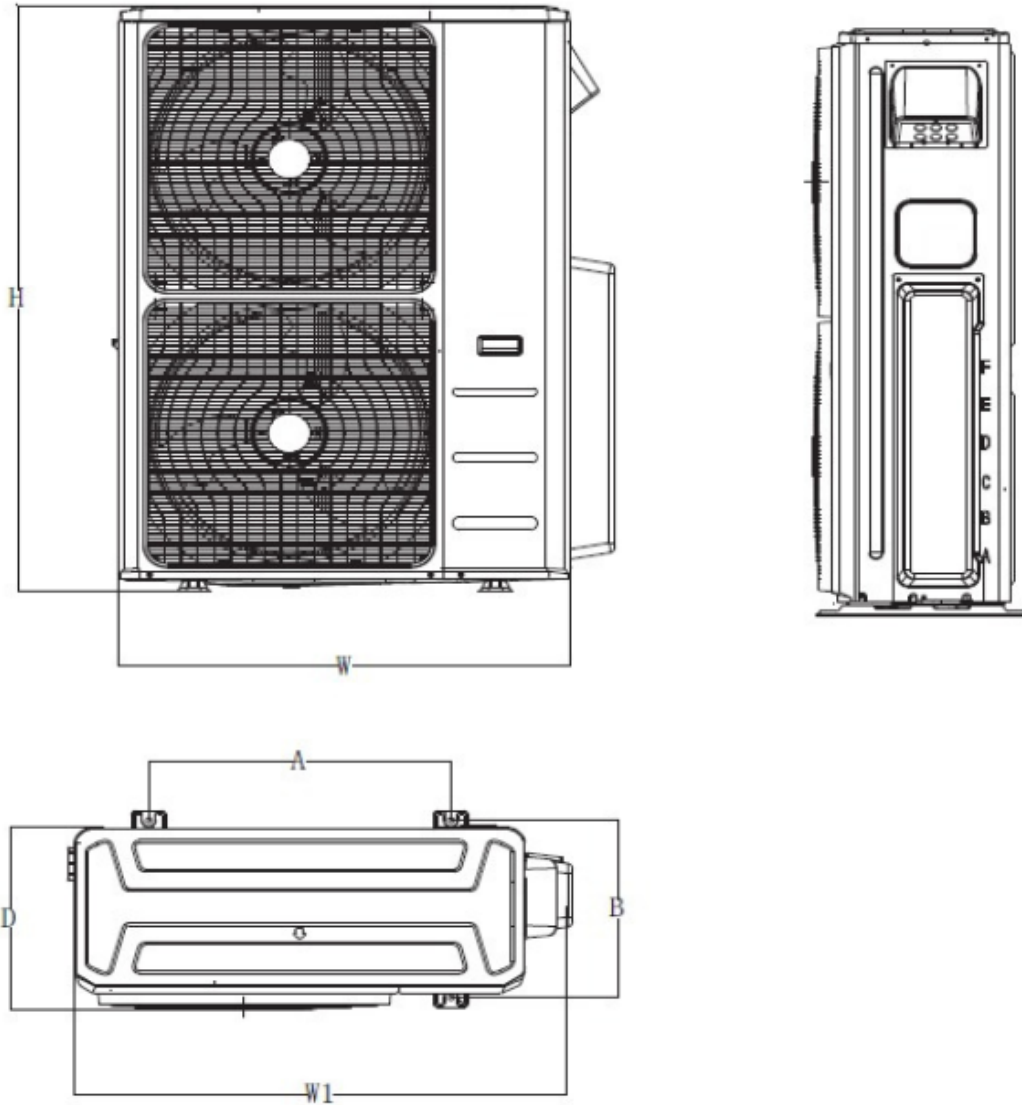

Unit	W	D	H	W1	A	B
mm	952	415	1333	1060	634	404
inch	37.5	16.3	52.5	41.7	25.0	15.9