

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____



KEY FEATURES:

- LED display
- Smart Kit included
- Quiet operation
- Multiple fan speeds (LOW/MED/HI/TURBO)
- Easy to remove filter
- Auto-swing for vertical and horizontal louvers
- Can be installed up to 2" from the ceiling




SPECIFICATIONS:

Indoor Model			CH-09MASTWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	9,000
Heating	Rated Capacity	Btu/h	12,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	382.35/335.29/229.41/176.47
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	38/33.5/23.5
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4" / 3/8"
Dehumidification		Pnt/H	0.80
Communication wiring			16AWG*4
Indoor	Dimension (WxDxH)	inch	33.66x9.09x11.69
	Packing (WxDxH)	inch	36.22x12.20x14.57
	Net/Gross Weight	lbs.	22.71/28.88

 **ASTORIA**

Units: in (mm)

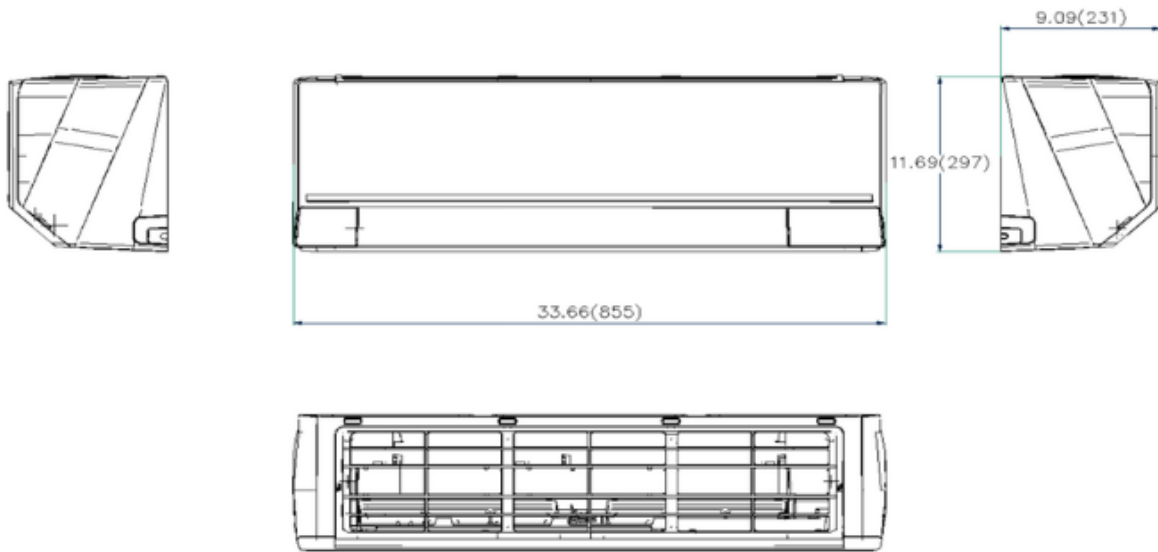

Dimension (WxDxH)
33.66x9.09x11.69